


DOOR OPENING:
 _____ W x _____ H
 DOUBLE SINGLE
 QUANTITY: _____

MODEL
 T50 T100 T150
 FABRIC COLOR: _____

OPTIONS
 (CHECK BOX IF APPLICABLE)
 - HOLD OPEN DEVICE
 - 270° HINGE
 - TOP PLATE
 - MIDDLE PLATE
 - TOP & MIDDLE PLATE
 - FULL KICKPLATE
 - EXTENSION "U" BRACKETS

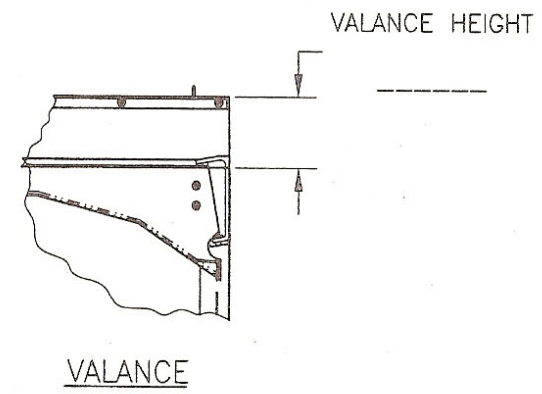

- 1 - GRAVITY ARM ASSEMBLY
- 2 - FOOD GRADE APPROVED SINGLE-PLY 40 oz. REINFORCED VINYL (T50), DOUBLE PLY (T100) OR TRIPLE-PLY (T150)
 - R100 & R150 RECOMMENDED FOR DOOR OPENINGS OVER 8' WIDE x 8' HIGH
- 3 - 13 1/2" WIDE x 13" HIGH CLEAR PVC WINDOW
- 4 - 1/8" THICK x 48" HIGH BLACK SUPERLON

*** RECOMMENDED FRAMING REQUIREMENTS:
 1/8" THICK x 4" WIDE FACE STEEL FRAME MOUNTED TO A SOLID FOUNDATION.

S.S. QUOTE REF. # _____
 CUSTOMER _____
 APPROVED BY: _____
 P/O No.: _____
 DATE: _____

SUPER SEAL

SERIES 2000 - MODELS T50, T100 & T150
 THERMAL FLEXIBLE VINYL IMPACT DOORS

DATE: NOV-23-04	SCALE: 1:24
DRAWN: GK	DWG NO: L2000-D